

NOTE: 12 in. minimum handrail extension required at each top rise. Y is the minimum handrail extension of 12 in. required at the bottom rise.

Fig. 39
Nominal Size and Spacing of
Handrails and Grab Bars

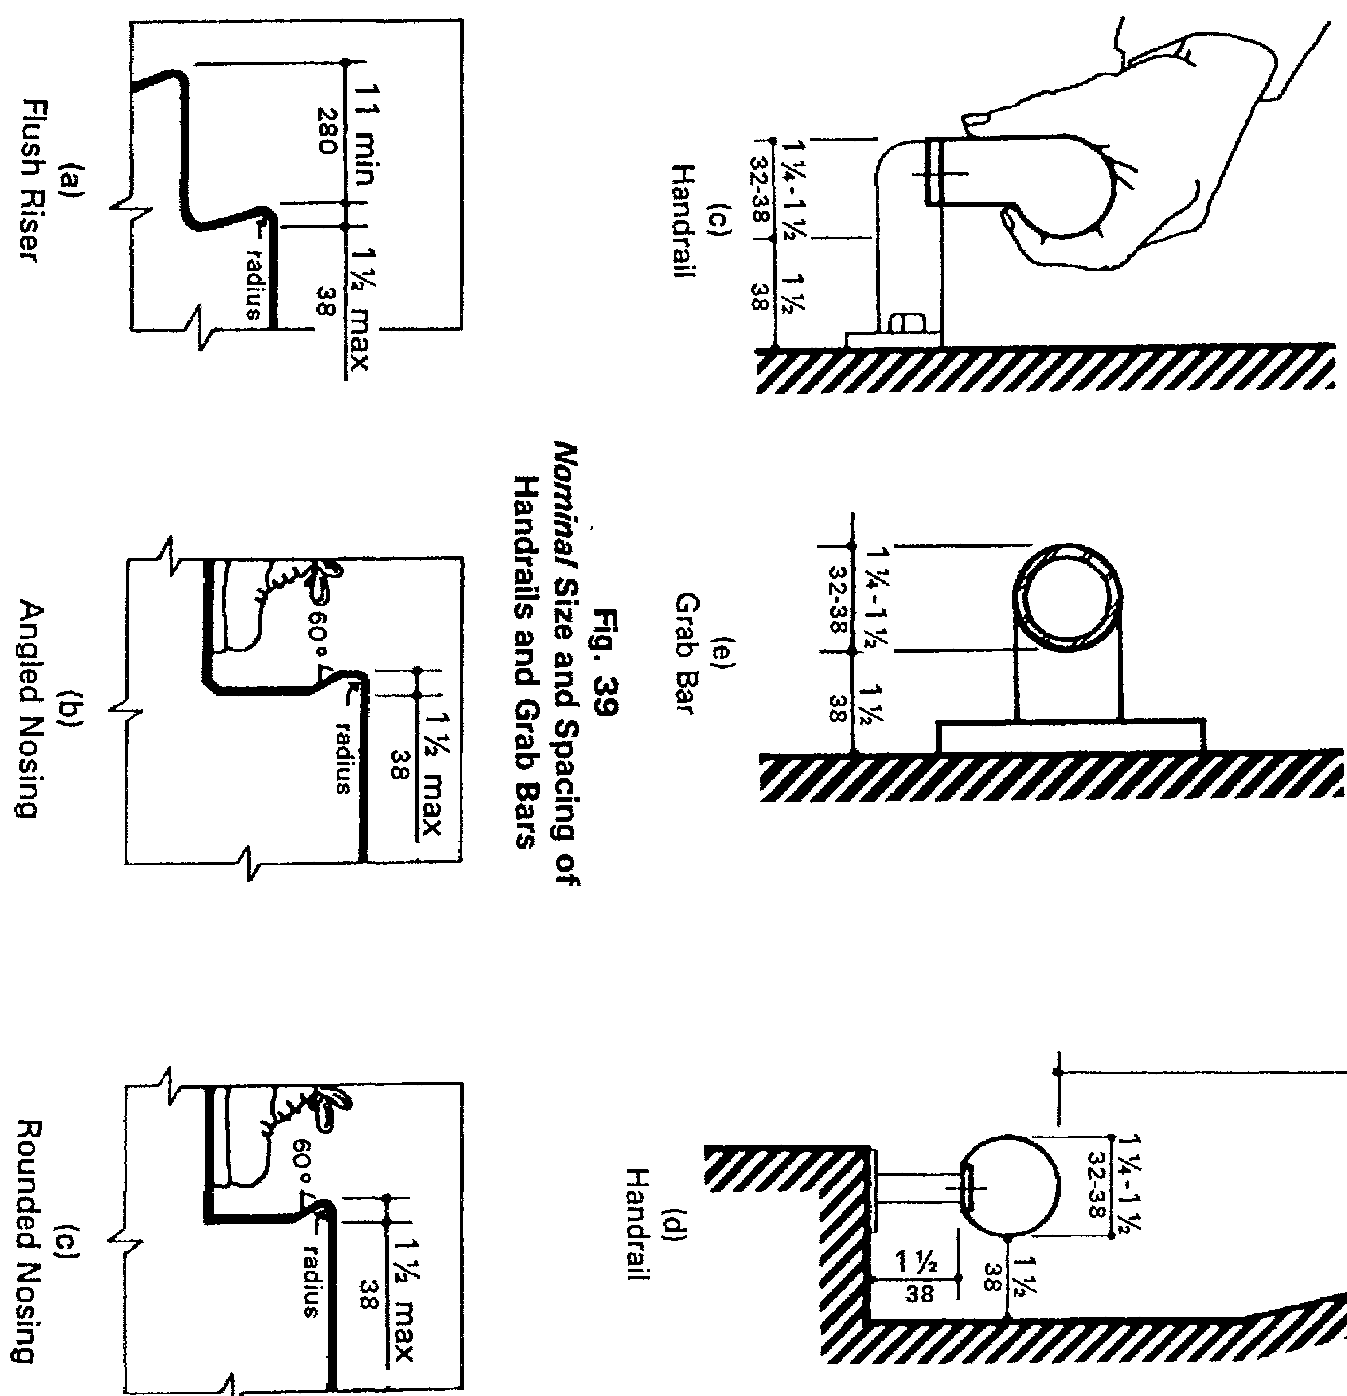


Fig. 18
Usable Tread Width and
Examples of Acceptable Nosings

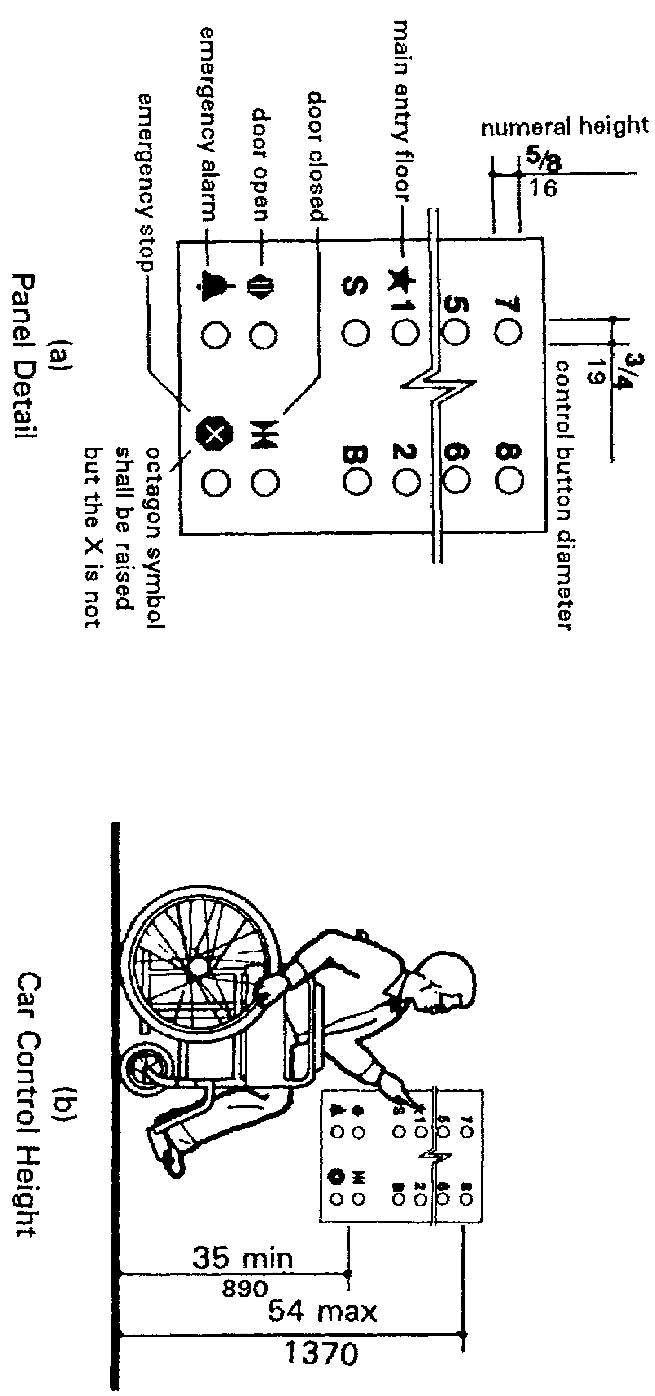


Fig. 20
Hallway and Elevator Entrances

NOTE: 36 in. minimum clear width is required at each door. Line A and line B are the minimum clear width of the door opening. Line C is the minimum clear width of the door opening. Line D is the minimum clear width of the door opening.

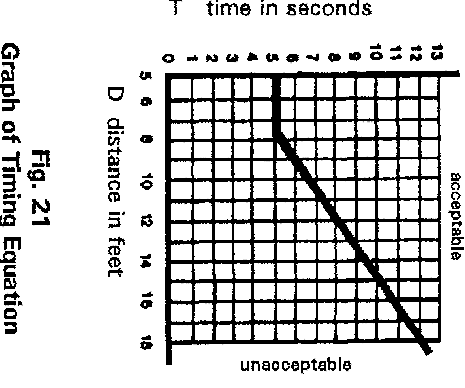
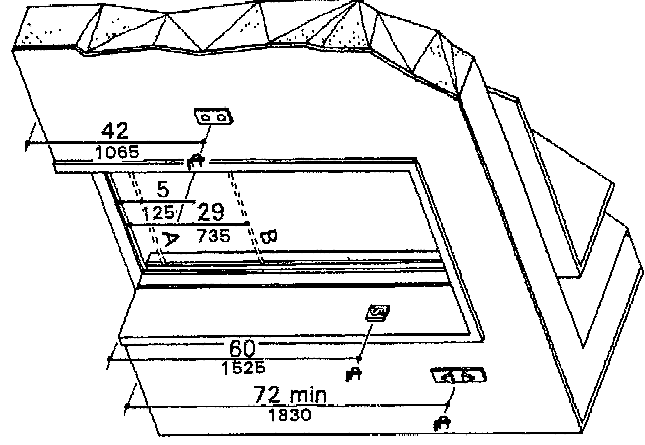


Fig. 21
Graph of Timing Equation

Fig. 22
Minimum Dimensions of Elevator
Cabs




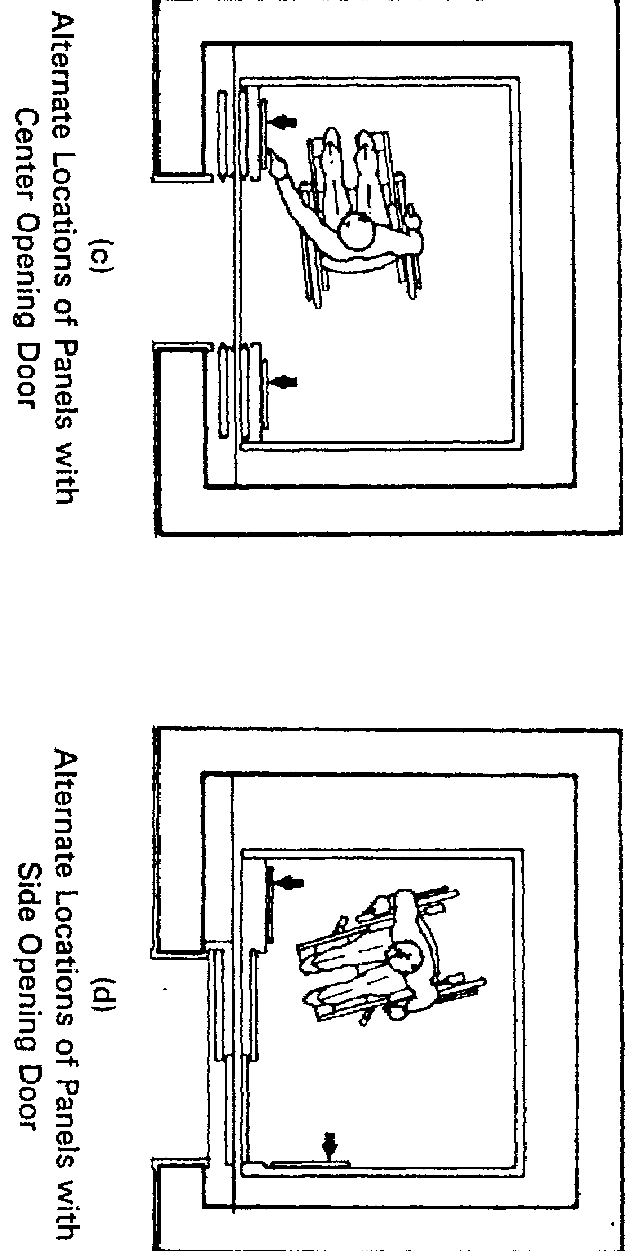


Fig. 23
Car Controls


NOTE: OPPOSITE SIDES SIMILAR

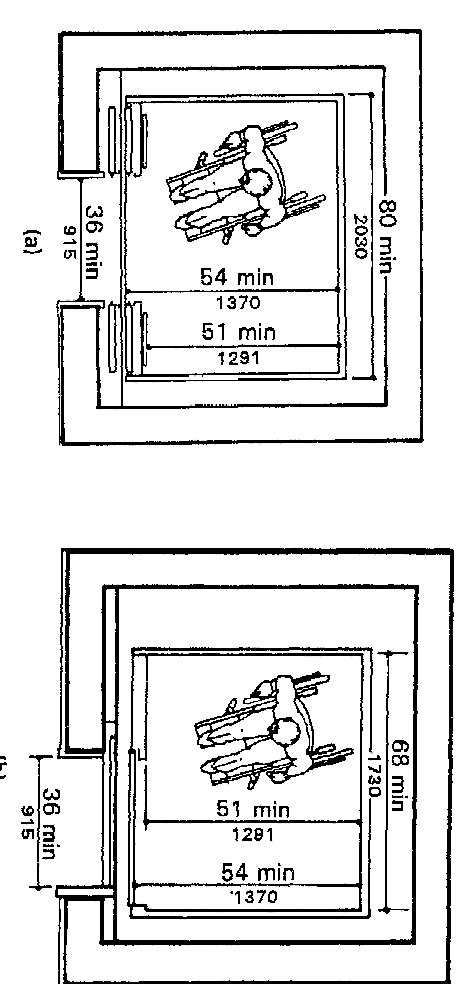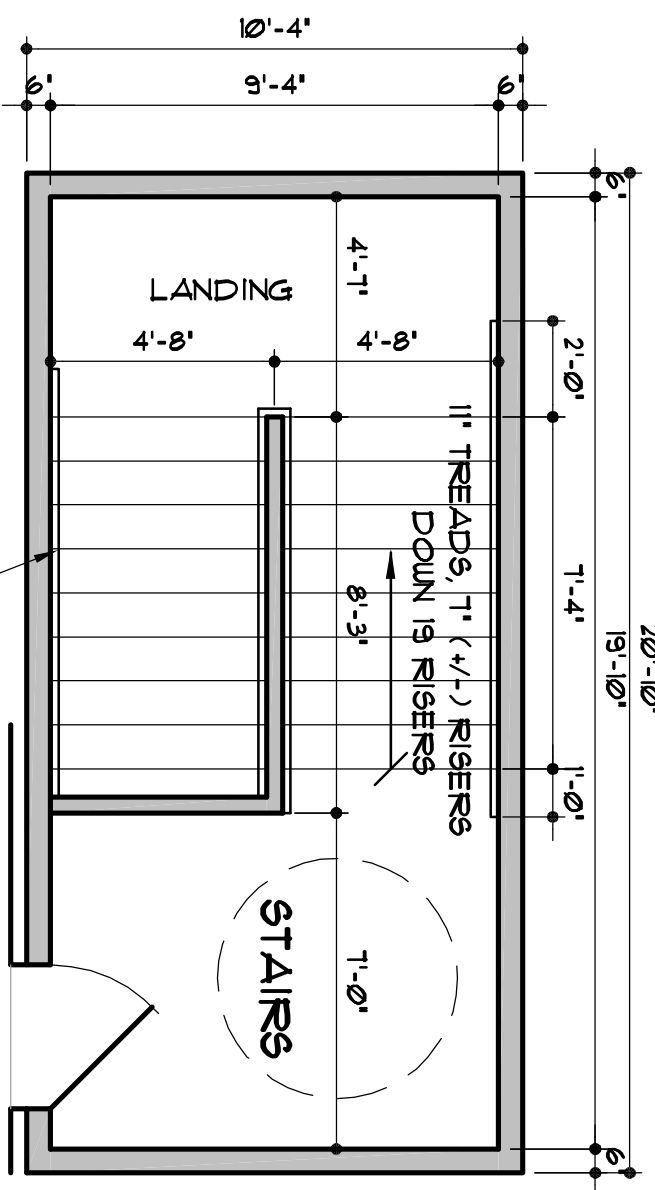


FOURTH FLOOR PLAN

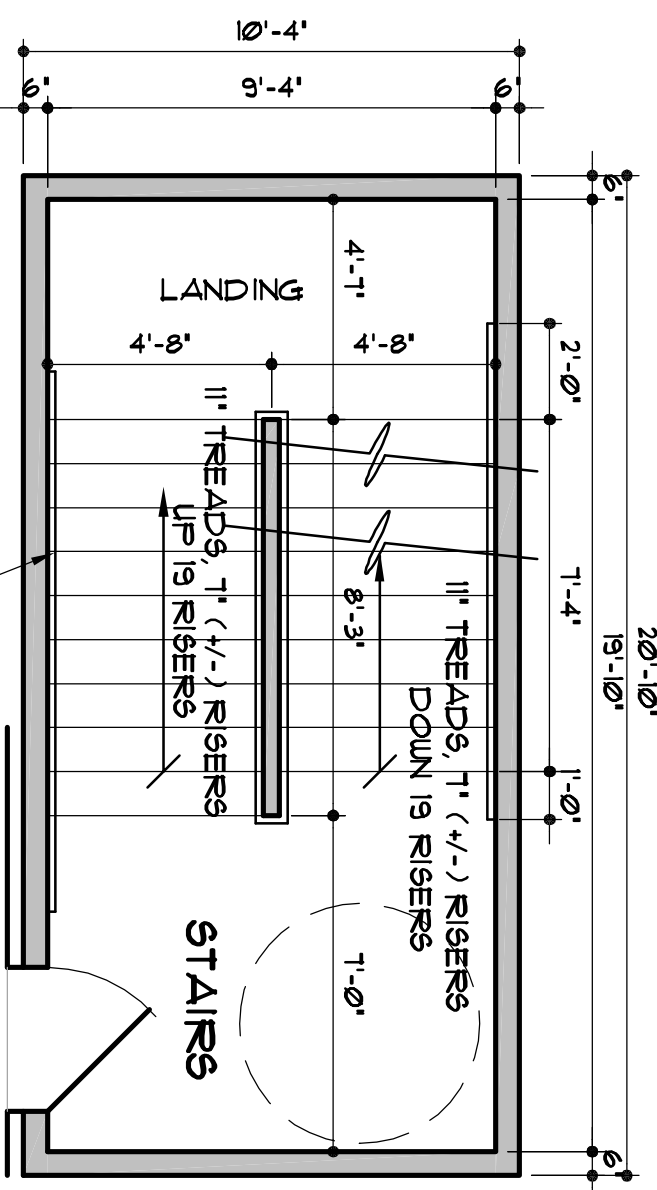

THIRD FLOOR PLAN

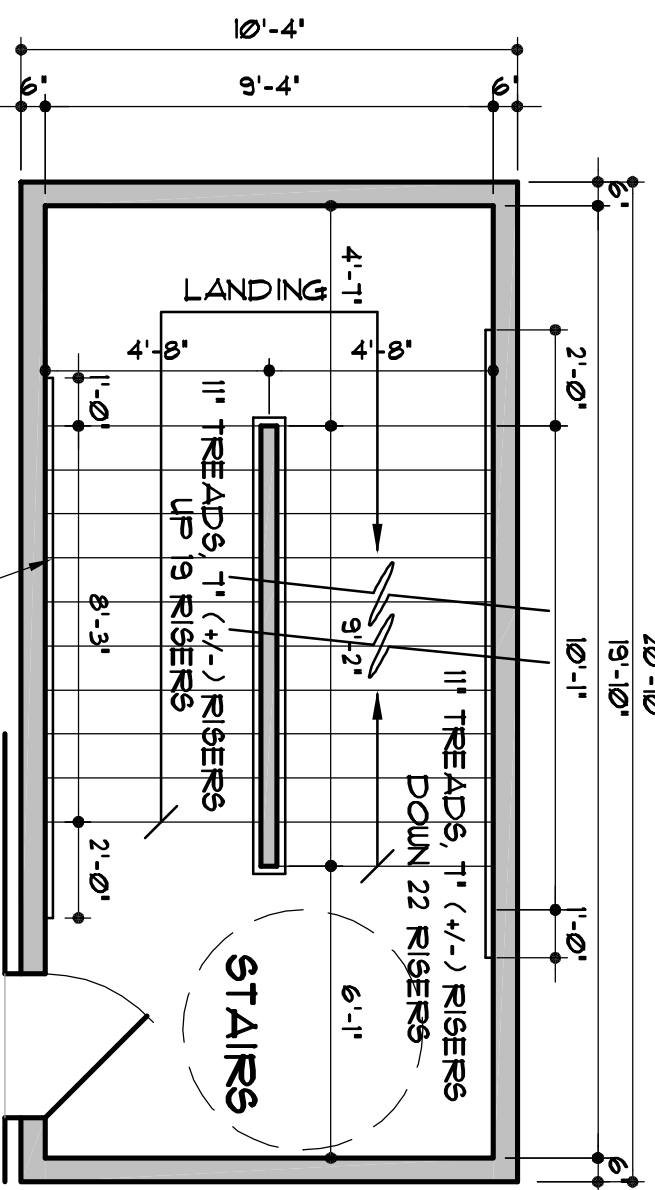

SECOND FLOOR PLAN

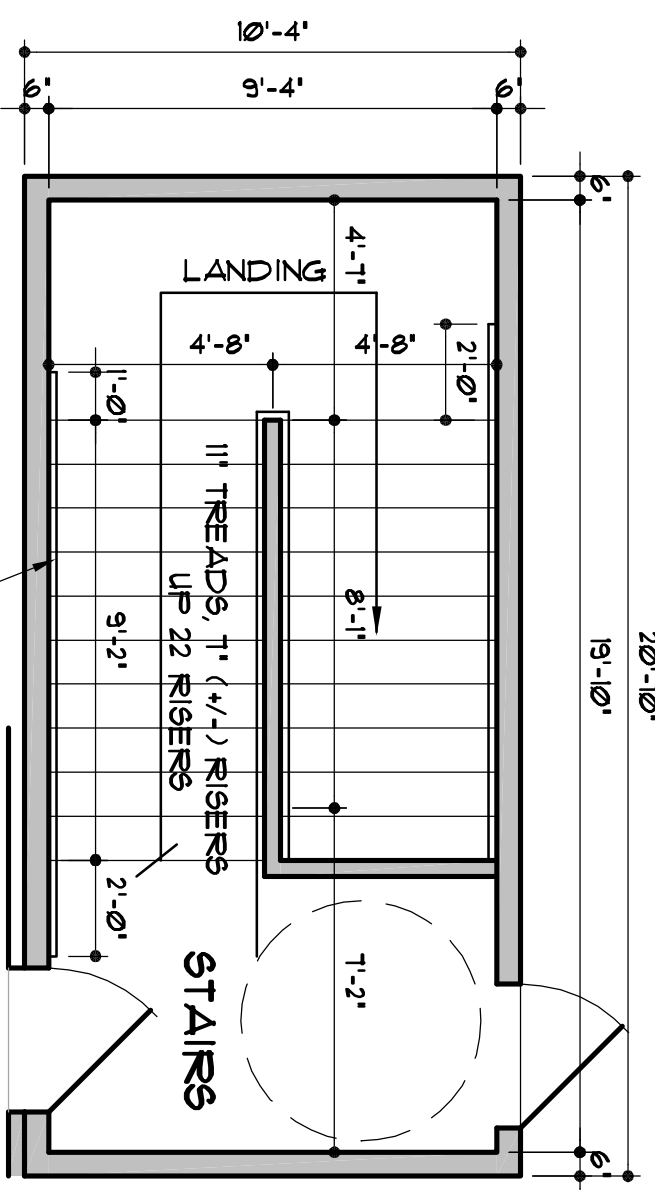

FIRST FLOOR PLAN


STAIR FLOOR PLANS

1

SCALE: 1/4" = 1'-0"

REVISIONS	BY

LaQuinta Inn and Suites
MARKET CENTER – LOCATION 6482
DALLAS, TEXAS



RSS ARCHITECTS LLC.
2201 DOTTIE LYNN PKWY, SUITE H5
FORT WORTH, TEXAS 76120
PH: 817/640-9003 FAX: 817/649-8410

Date	2-11-10
Revised	
Drawn	
Job	06060
Sheet	
A-502	
OR	Sheets